




# GSM ALARM AND MANAGEMENT PANEL **ESIM264**

Up to 44 zones

Up to 44 PGM

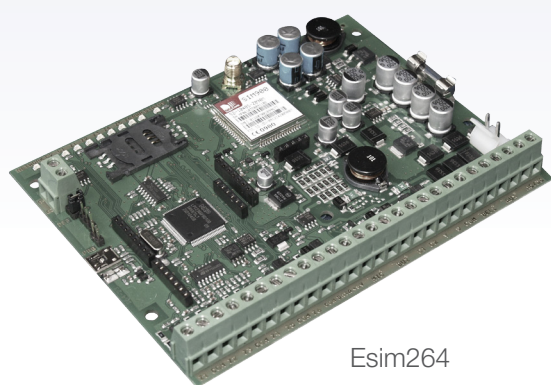

Esim264

SMS CALLS



Personal alarms

CONTACT ID  
GPRS, GSM



Alarm receiving centre

GPRS  
SMS

- Heating control
- 0..3 VDC
- 4..20 mA
- Temperature monitoring
- Tank level monitoring



EKB2



EKB3

- Compatible with KRONOS monitoring station software
- Compatible with any alarm receiving centre which use MLR2-DG protocol (EGR100 software needed)
- Intercom extension module
- Lights, temperature, heating control via SMS or internet using special Eldes software

On-board zones	6 (12 ATZ mode)
Partitions	2
Expandable zones up to	44
Expandable wireless devices: (zones, PGM, key fobs, etc.)	16
Keypads	4
Keypad zone support	yes
Keypad user codes	10
Dallas key iButton reader	yes

On-board programmable outputs	4x500mA
Expandable programmable outputs up to	44
Event Buffer	500
Built in GSM/GPRS module	900/850/1800/1900 MHz
Ways of event communication	Ademco Contact ID, SMS, Voice Calls, GPRS
Authorised users	5
Digital temperature sensor	DS18S20, DS18B20
Microphone	yes
Audio OUT	yes